




# QP SERIES

INTERCHANGEABLE CIRCUMFERENTIAL PISTON PUMPS

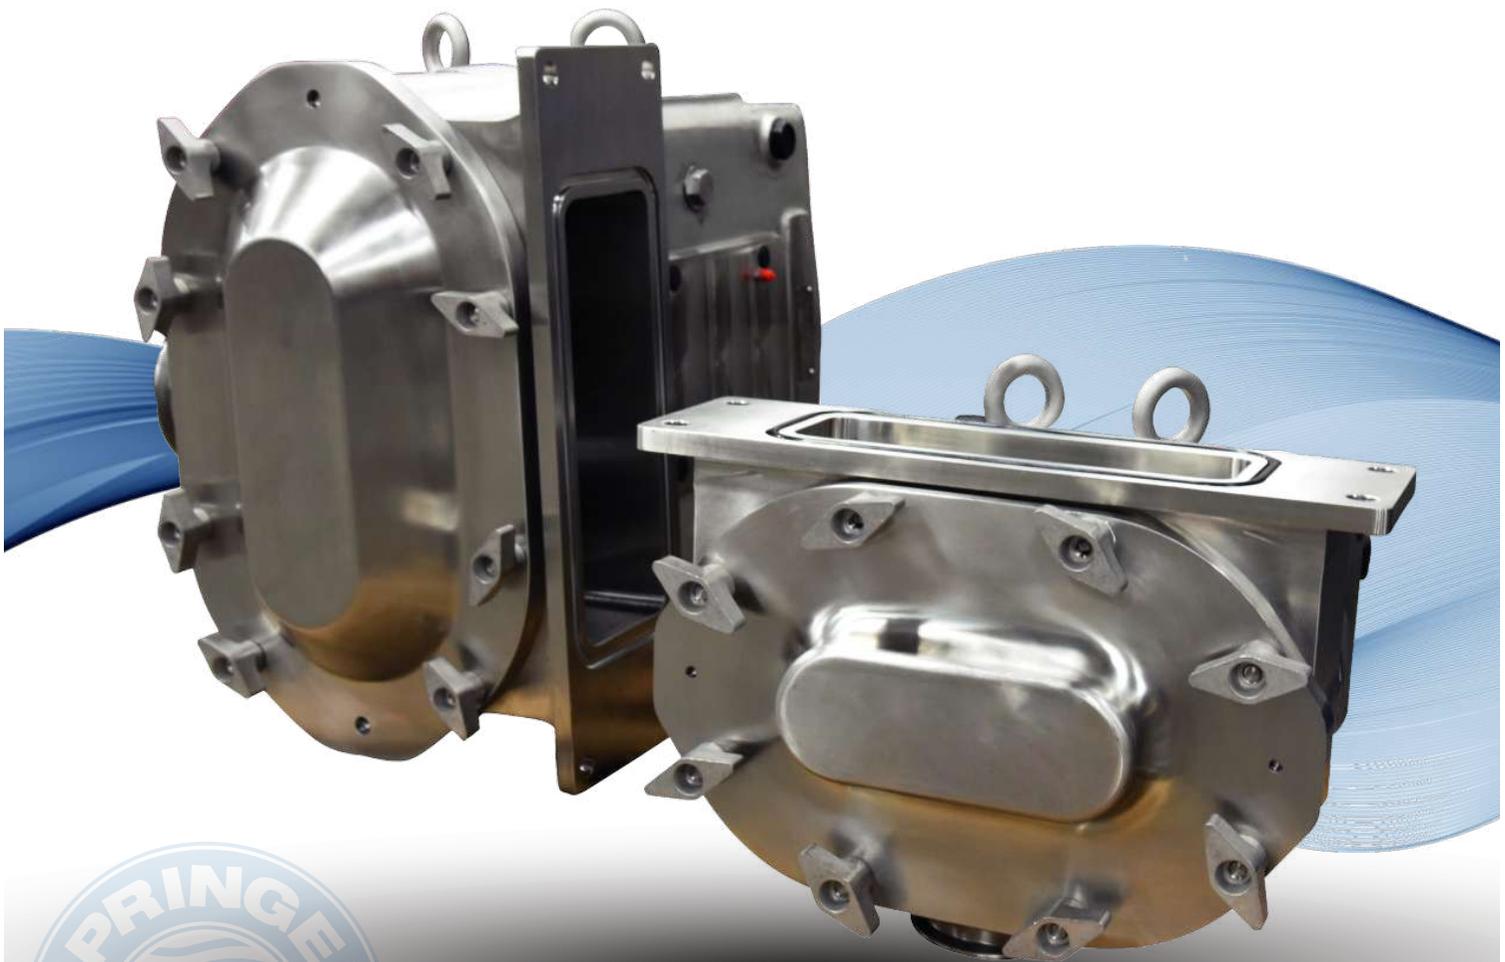

[www.qpumps.com](http://www.qpumps.com)

Tel: 866-777-6060  
Fax: 866-777-6383

Springer Pumps, LLC

Website: [www.springerpumps.com](http://www.springerpumps.com)  
Int'l: +001 267 404 2910

# QP SERIES

QP1 and QP2 pump series are 100% dimensionally and hydraulically interchangeable with other brands in the market. Unlike the competition, Q-Pumps supplies the pump with a 304 stainless steel gearbox, without this great advantage implying an increase in the final price of the equipment.

3-A & EHEDG certified.



**Φ** 312 GPM / 1,173 LPM

**μ** hasta 1,000,000 cP

**P** 500 psi / 34.5 bar  
1155 ft / 352 m

**T** 150 °C / 302 °F

## CHARACTERISTICS

- Gearbox made of stainless steel, which makes it more resistant than conventional cast-iron gearboxes.
- 304 stainless steel seals.
- Helical gears
- Flexibility for 4 mounting positions.
- Solid 17-4 ph stainless steel shafts.
- Grease fittings on both sides.
- Antimicrobial lubricant.
- Alloy 88 rotors
- 6 threaded oil plugs with glass peepholes.
- Self-cleaning packages in the plugs.



## ADVANTAGES:



Q-Pumps circumferential piston pumps are designed to cover all hygienic pumping applications in the food, dairy, beverage, pharmaceutical and other industries.

Due to its reduced internal tolerances it has a wide range of applications, from low viscosity products such as water, to highly viscous products such as toothpaste.

- The oil-seal is made of stainless steel which prevents oxidation.
- High-torque shafts made of one alloy makes them more resistant.
- Self-cleaning gaskets.
- 100% interchangeable and compatible with other series in the market
- Remanufacturing program\*: Reconditioned pumps with a one-year warranty.



# UNIVERSALLY INTERCHANGEABLE

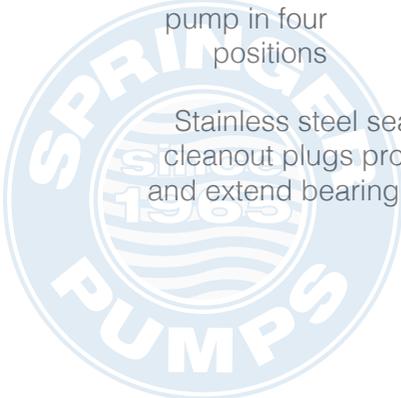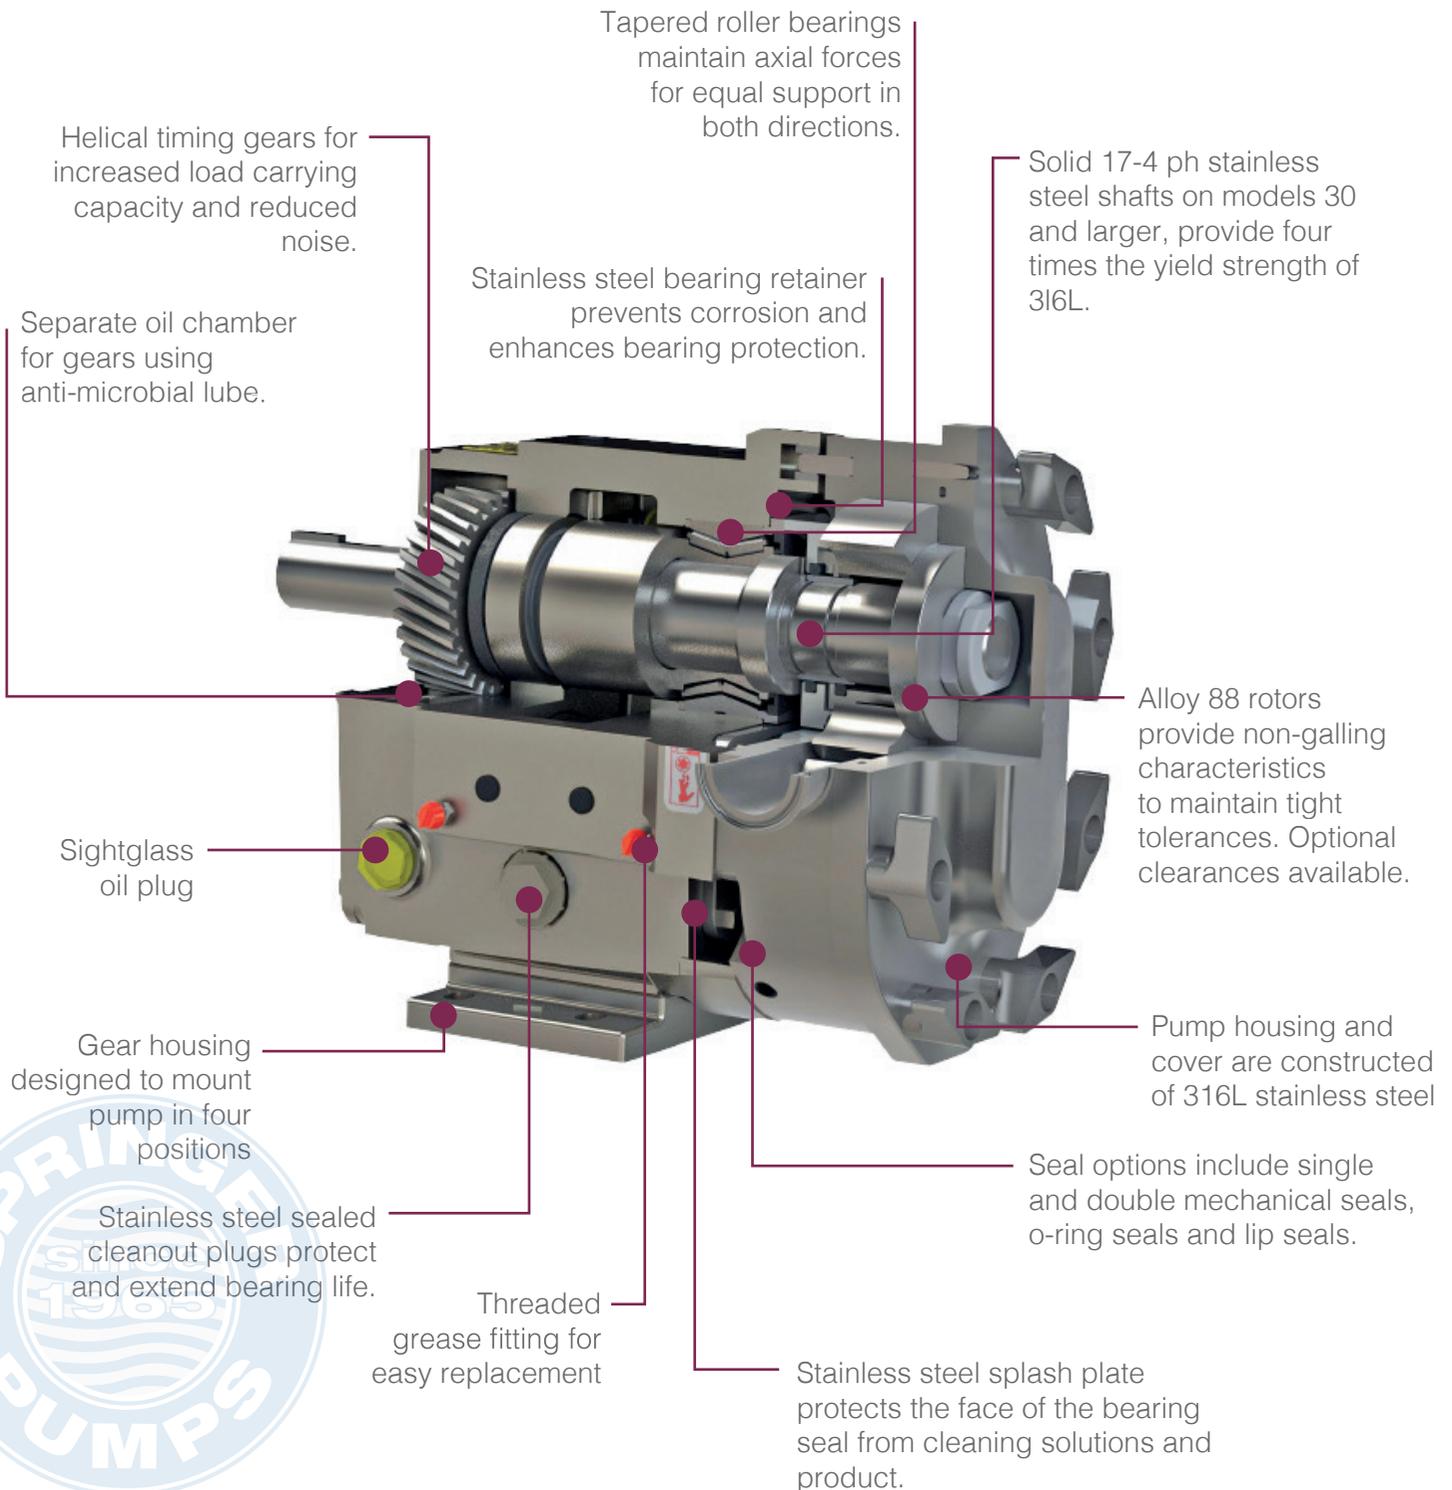

## QP1+ SERIES

The new QP1 + Series represents the improvements made to our well-known QP line, facilitating maintenance processes, saving time and costs.

- Design with O-Rings located on the front of the pump.
- The O-Rings can be changed without the need to disconnect the pump from the system.
- The design of a sleeve in one piece seals the pump when the rotors are removed for cleaning in place.
- Fewer parts, simpler maintenance, and shorter downtime give greater savings.
- 3-A certified.

## QP2 SERIES

QP2 Series with its stainless steel gearcase are built for CIP-ability with enclosed rotor nuts, can handle higher pressures with its larger 17-4ph stainless steel shafts and are capable of withstanding pressures of up to 500 PSI.

- Larger shafts to increase pump life.
- All QP2 pumps and equivalents can be converted into QP3.
- Cost and time savings due to its CIP capacity.
- Designed for Clean In Place.
- 3-A Certified.




## QP3 SERIES

NEW!

The brand new QP3 series pumps with new rotor case design for maximum efficiency and a patented front-loading seal for ease-of-maintenance, eliminate all dead zones in the pump. 3-A & EHEDGH Certified.

- Front Loading Seal Design
- 304 Stainless Steel Gearcase
- Gasketed Stainless Steel Cleanout Plugs
- Alloy 88 Rotors
- Hardened Seal Faces Generate Less Heat
- Stainless Steel Bearing Retainers
- Helical Gears
- 4-Way Mounting
- Multiple Access Threaded Grease Zerks
- Anti-Microbial Lube
- Stainless Steel Splash Plate

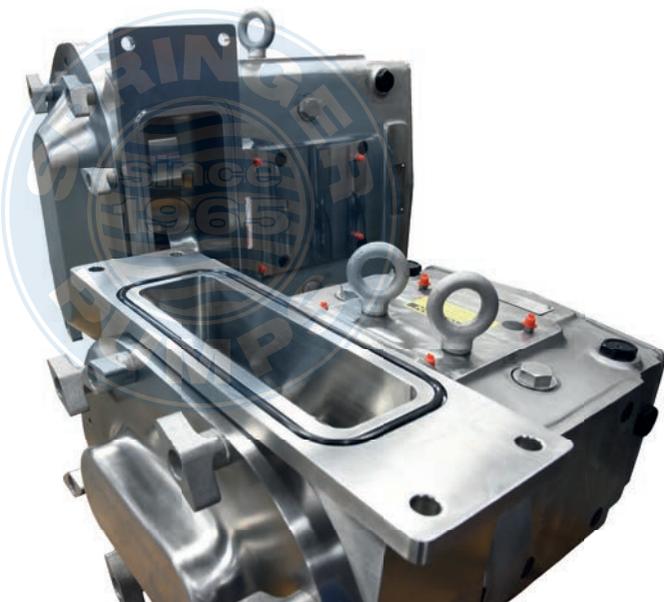

# TECHNICAL INFORMATION

## QP1 PUMP PERFORMANCE


Model QP1	Nominal Capacity		Displacement		Maximum Nominal Capacity		Standard Connection		Optional Connection		Maximum Velocity	Temperature Range	
	GPM	LPM	Gal / Rev	L / Rev.	PSI	Bar	in.	mm	in.	mm		RPM	°F
6	7	24.8	0.0082	0.031	200	13.8	1	25	1½"	38	800	-40° a 300°	-40° a 149°
15	10	37.6	0.0142	0.054	200	13.8	1½"	38	-	-	700		
18	17	65.9	0.029	0.110	200	13.8	1½"	38	2"	51	600		
30	36	136.3	0.060	0.227	200	13.8	1½"	38	2"	51	600		
40	46	172.6	0.076	0.288	150	10.3	2"	51	2½"	64	600		
60	92	347.5	0.153	0.579	200	13.8	2½"	64	3"	76	600		
130	152	576.8	0.254	0.961	200	13.8	3"	76	-	-	600		
220	313	1185.5	0.522	1.976	200	13.8	4"	102	-	-	600		
320	452	1712.3	0.754	2.854	200	13.8	6"	152	-	-	600		
323	370	1398.9	0.616	2.332	225	15.5	6"	152	-	-	600		

	Nominal Capacity		Displacement		Maximum Differential Pressure		Rectangular Inlet (A x L)		Outlet		Maximum Velocity	Temperature Range	
	GPM	LPM	Gal / Rev	L / Rev.	PSI	Bar	in.	mm	in.	mm		RPM	°F
34	24	90.8	0.060	0.227	200	13.8	1.75 x 6.75	44 x 171	2"	51	400	-40° a 300°	-40° a 149°
64	61	231.6	0.153	0.579	200	13.8	2.24 x 8.82	57 x 224	2½" (3")	64 (76)	400		
134	102	384.6	0.254	0.961	200	13.8	2.97 x 9.25	75 x 235	3"	76	400		
224	208	788.8	0.521	1.972	200	13.8	3.78 x 11	98 x 279	4"	102	400		
324	301	1139.2	0.754	2.854	200	13.8	5.00 x 17.38	127 x 441	6"	152	400		

## QP2/QP3 PUMP PERFORMANCE

	Nominal Capacity		Displacement		Maximum Nominal Capacity		Standard Connection		Optional Connection		Maximum Velocity	Temperature Range	
	GPM	LPM	Gal / Rev	L / Rev	PSI	Bar	in.	mm	in.	mm		RPM	°F
6	8	31.0	0.0082	0.031	300	20.7	1"	25	1½"	38	1000	-40° a 300°	-40° a 149°
15	11	43.0	0.0142	0.054	250	17.2	1½"	38	-	-	800		
18	20	76.8	0.029	0.110	200	13.8	1½"	38	2"	51	700		
30	36	136.3	0.060	0.227	250	17.2	1½"	38	2"	51	600		
40	46	172.6	0.076	0.288	150	10.3	2"	51	2½"	64	600		
45	59	222.6	0.098	0.371	450	31.0	2"	51	-	-	600		
60	92	347.5	0.153	0.579	300	20.7	2½"	64	3"	76	600		
130	152	576.8	0.254	0.961	200	13.8	3"	76	-	-	600		
180	228	863.0	0.380	1.438	450	31.0	3"	76	-	-	600		
210	301	1140.0	0.502	1.900	500	34.5	4"	102	-	-	600		
220	313	1185.5	0.522	1.976	300	20.7	4"	102	-	-	600		
320	452	1712.3	0.754	2.854	300	20.7	6"	152	-	-	600		

	Nominal Capacity		Displacement		Maximum Differential Pressure		Rectangular Inlet (A x L)		Outlet		Maximum Velocity	Temperature Range	
	GPM	LPM	Gal / Rev	L / Rev	PSI	Bar	in.	mm	in.	mm		RPM	°F
34	24.0	90.8	0.060	0.227	250	17.2	1.81 x 6.84	44 x 174	2"	51	400	-40° a 300°	-40° a 149°
64	61.2	231.6	0.153	0.579	300	20.7	2.44 x 9.0	62 x 229	2½" (3")	64 (76)	400		
134	101.6	384.6	0.254	0.961	200	13.8	3.19 x 9.38	81 x 238	3"	76	400		
224	208	788.8	0.521	1.972	300	20.7	4.06 x 11.25	103 x 286	4"	102	400		
324	401	1517.7	0.752	2.847	300	20.7	4.25 x 12.7	108 x 322.5	6"	152.4	400		

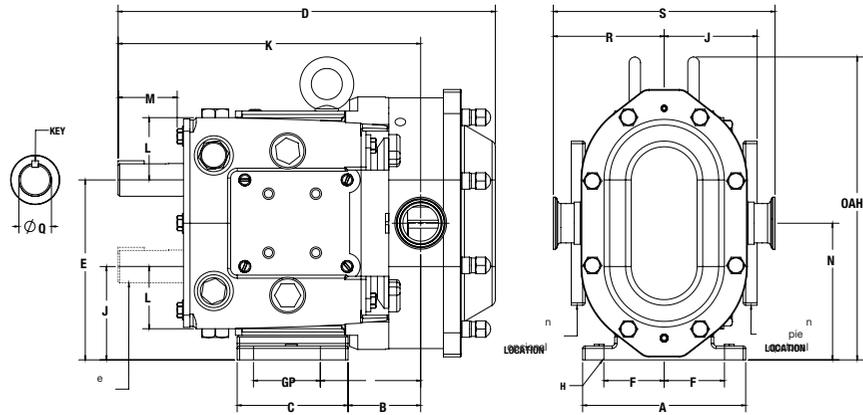


QP1 DIMENSIONS

QP1 Model		A	B	C	D	E	F	G	H	J	K
6	IN	4.75	1.95	3.75	12.04	5.50	1.94	2.31	.41, ranura	2.93	9.61
	MM	121	50	95	306	140	49	59	10, ranura	74	244
15	IN	4.75	1.95	3.75	12.04	5.50	1.94	2.31	.41, ranura	2.93	9.61
	MM	121	50	95	306	140	49	59	10, ranura	74	244
18	IN	4.75	2.18	3.75	12.46	5.50	1.94	2.31	.41, ranura	2.93	9.84
	MM	121	55	95	316	140	49	59	10, ranura	74	250
30	IN	6.25	2.78	4.25	14.58	6.86	2.31	2.56	.41, ranura	3.56	11.61
	MM	159	71	108	370	174	59	65	10, ranura	90	295
40	IN	6.25	2.94	4.25	14.96	6.86	2.31	2.56	.41, ranura	3.56	11.99
	MM	159	75	108	380	174	59	65	10, ranura	90	305
60	IN	8.25	4.14	5.87	18.91	9.56	3.50	4.12	0.53	5.06	15.14
	MM	210	105	149	480	243	89	105	13	129	385
130	IN	8.25	4.78	5.87	19.85	9.56	3.50	4.12	0.53	5.06	15.77
	MM	210	121	149	504	243	89	105	13	129	401
220	IN	8.50	3.69	9.00	23.37	12.38	3.75	7.25	.53, ranura	6.38	18.49
	MM	216	94	229	594	314	95	184	13 ranura	162	470
320	IN	12.00	4.12	11.63	30.17	13.88	5.25	8.00	.66, ranura	6.88	21.92
	MM	305	105	295	766	353	133	203	17 ranura	175	557
323	IN	12.00	4.12	11.63	30.17	13.88	5.25	8.00	.66, ranura	6.88	21.92
	MM	305	105	295	766	353	133	203	17 ranura	175	557

QP2/QP3 DIMENSIONS

QP2 / QP3 Model		A	B	C	D	E	F	G	H	J	K
6	IN	4.75	1.95	3.75	11.80	5.50	1.94	2.31	.41, ranura	2.93	9.61
	MM	121	50	95	300	140	49	59	10, ranura	74	244
15	IN	4.75	1.95	3.75	11.80	5.50	1.94	2.31	.41, ranura	2.93	9.61
	MM	121	50	95	300	140	49	59	10, ranura	74	244
18	IN	4.75	2.18	3.75	12.49	5.50	1.94	2.31	.41, ranura	2.93	9.84
	MM	121	55	95	317	140	49	59	10, ranura	74	250
30	IN	6.25	2.78	4.25	14.58	6.86	2.31	2.56	.41, ranura	3.56	11.61
	MM	159	71	108	370	174	59	65	10, ranura	90	295
40	IN	6.25	2.94	4.25	14.87	6.86	2.31	2.56	.41, ranura	3.56	11.99
	MM	159	75	108	380	174	59	65	10, ranura	90	305
45	IN	8.25	3.86	5.87	18.56	9.56	3.50	4.12	0.53	5.06	14.86
	MM	210	98	149	471	243	89	105	13	129	377
60	IN	8.25	4.14	5.87	19.32	9.56	3.50	4.12	0.53	5.06	15.14
	MM	210	105	149	491	243	89	105	13	129	385
130	IN	8.25	4.78	5.87	20.33	9.56	3.50	4.12	0.53	5.06	15.77
	MM	210	121	149	516	243	89	105	13	129	401
180	IN	8.50	3.45	9.00	23.53	12.38	3.75	7.25	.53, ranura	6.38	18.25
	MM	216	88	229	598	314	95	184	13 ranura	162	464
220	IN	8.50	3.69	9.00	24.27	12.38	3.75	7.25	.53, ranura	6.38	18.49
	MM	216	94	229	616	314	95	184	13 ranura	162	470
210	IN	12.00	3.45	11.63	27.08	13.88	5.25	8.00	.66, ranura	6.88	21.24
	MM	305	88	295	688	353	133	203	17 ranura	175	539
320	IN	12.00	3.84	11.63	27.66	13.88	5.25	8.00	.66, ranura	6.88	21.92
	MM	305	98	295	703	353	133	203	17 ranura	175	557

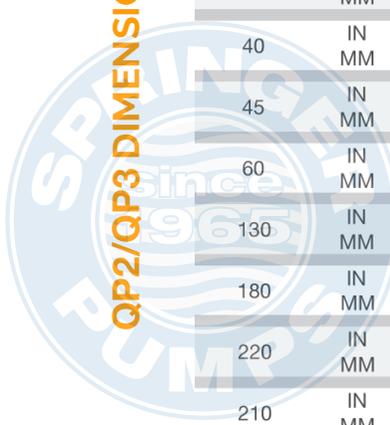


QP1 DIMENSIONS

L	M	N	Inlet	P	Q	Wrench	R	S	OAH	Weight	
2.12 54	2.00 51	4.21 107	1" 25	2.79 71	0.875 22.2	0.1875 4.76	3.49 89	6.97 177	8.30 211	LB KG	60 27
2.12 54	2.00 51	4.21 107	1½" 38	2.79 71	0.875 22.2	0.1875 4.76	3.49 89	6.97 177	8.30 211	LB KG	60 27
2.12 54	2.00 51	4.21 107	1½" 38	3.02 77	0.875 22.2	0.1875 4.76	3.55 90	7.09 180	8.30 211	LB KG	64 29
2.62 67	2.32 59	5.21 132	1½" 38	3.84 98	1.25 31.8	0.250 6.35	4.25 108	8.50 216	10.29 261	LB KG	130 59
2.62 67	2.32 59	5.21 132	2" 51	4.00 102	1.25 31.8	0.250 6.35	4.31 109	8.62 219	10.29 261	LB KG	140 64
3.50 89	2.25 57	7.31 186	2½" 64	5.01 127	1.625 41.3	0.375 9.53	5.37 136	10.75 273	15.31 389	LB KG	285 129
3.50 89	2.25 57	7.31 186	3" 76	5.65 144	1.625 41.3	0.375 9.53	5.37 136	10.75 273	15.31 389	LB KG	305 138
4.50 114	2.75 70	9.38 238	4" 102	4.44 113	2.00 50.8	0.500 12.70	6.63 168	13.25 337	19.13 486	LB KG	565 256
5.06 129	4.06 103	10.38 264	6" 150# FLG	5.37 136	2.375 60.3	0.625 15.88	8.00 203	16.00 406	22.38 568	LB KG	900 408
5.06 129	4.06 103	10.38 264	6" 150# FLG	5.37 163	2.375 60.3	0.625 15.88	8.00 203	16.00 406	22.38 568	LB KG	900 408

QP2/QP3 DIMENSIONS

L	M	N	Inlet	P	Q	Wrench	R	S	OAH	Weight	
2.12 54	2.00 51	4.21 107	1" 25	2.79 71	0.875 22.2	0.1875 4.76	3.49 89	6.97 177	8.30 211	LB KG	56 25
2.12 54	2.00 51	4.21 107	1½" 38	2.79 71	0.875 22.2	0.1875 4.76	3.49 89	6.97 177	8.30 211	LB KG	60 27
2.12 54	2.00 51	4.21 107	1½" 38	3.02 77	0.875 22.2	0.1875 4.76	3.49 89	6.97 177	8.30 211	LB KG	65 30
2.62 67	2.32 59	5.21 132	1½" 38	3.84 98	1.25 31.8	0.250 6.35	4.25 108	8.50 216	10.29 261	LB KG	130 59
2.62 67	2.32 59	5.21 132	2" 51	4.00 102	1.25 31.8	0.250 6.35	4.31 109	8.62 219	10.29 261	LB KG	140 64
3.50 89	2.25 57	7.31 186	2" 51	4.73 120	1.625 41.3	0.375 9.53	5.37 136	10.75 273	15.31 389	LB KG	265 120
3.50 89	2.25 57	7.31 186	2½" 64	5.01 127	1.625 41.3	0.375 9.53	5.37 136	10.75 273	15.31 389	LB KG	285 129
3.50 89	2.25 57	7.31 186	3" 76	5.65 144	1.625 41.3	0.375 9.53	5.37 136	10.75 273	15.31 389	LB KG	305 138
4.50 114	2.75 70	9.38 238	3" 76	4.20 107	2.00 50.8	0.500 12.70	6.53 166	13.06 332	19.13 486	LB KG	520 236
4.50 114	2.75 70	9.38 238	4" 102	4.44 113	2.00 50.8	0.500 12.70	6.63 168	13.25 337	19.13 486	LB KG	590 268
5.06 129	4.06 103	10.38 264	4" 102	4.70 119	2.38 60.5	0.625 15.88	7.38 187	14.75 375	22.38 568	LB KG	802 364
5.06 129	4.06 103	10.38 264	6" 150# FLG	5.09 129	2.38 60.5	0.625 15.88	8.00 203	16.00 406	22.38 568	LB KG	850 386

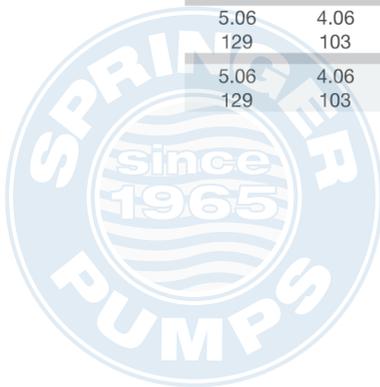

# QP SERIES

INTERCHANGEABLE CIRCUMFERENTIAL PISTON PUMPS

## RENOVATION PROGRAM

The Remanufacturing Program provides a remanufactured pump with completely new shafts, bearings, seals, helical style gears and Alloy 88 rotors, allowing customers to purchase a new pump with a significant saving.



## PREMIUM ECONOMY


The Premium Economy or PE program is designed for customers who need immediate delivery or who demand lower costs for a premium quality pump.

This program allows you to enjoy the benefits of the QP Series pumps, at an excellent price.

## MODELS

Cross Reference	
Q-Pumps	Other Brands
QP1	Universal 1/TRA 10
QP2	Universal 2/TRA 20
QP3	N/A

Distributed by:

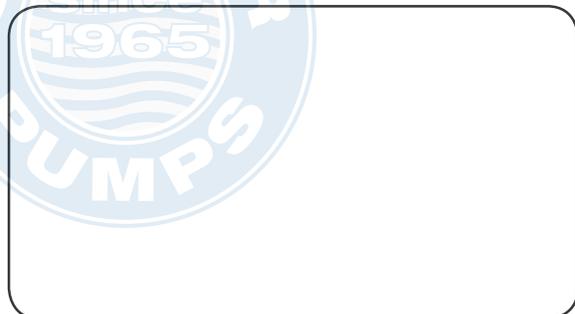

Tel: 866-777-6060  
Fax: 866-777-6383

Springer Pumps, LLC



For more information visit:

[www.qpumps.com](http://www.qpumps.com)

or call us at +52 (442) 103 31 00

Website: [www.springerpumps.com](http://www.springerpumps.com)  
Int'l: +001 267 404 2910