


MODEL DMF2 METALLIC FLAP VALVE TECHNICAL DATA SHEET

Drillers Series Pumps operate on compressed air and are ideal for oil and gas drilling applications.

PERFORMANCE

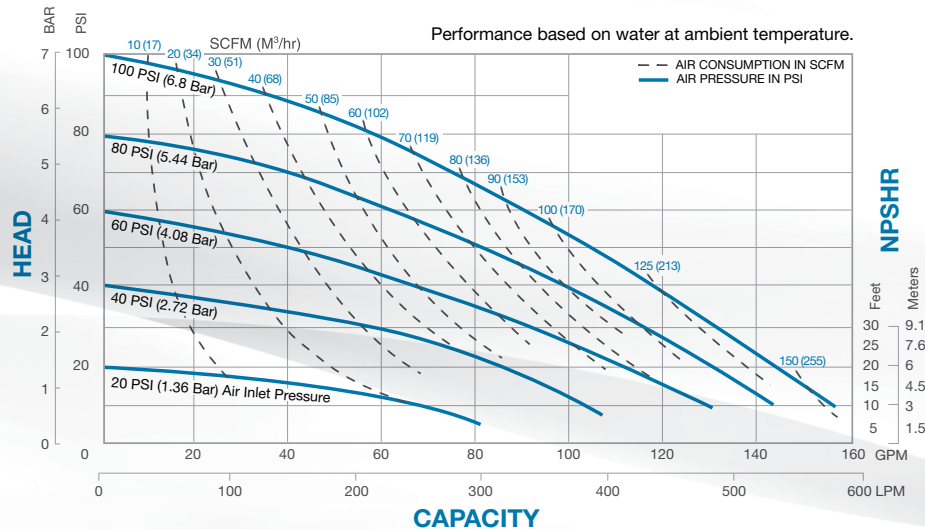

SPECIFICATIONS

SUCTION / DISCHARGE PORT SIZE
2" NPT

CAPACITY
0 to 140 gallons (530 liters) per minute

AIR END
Aluminum
Nitrile Elastomers

WET END
Aluminum
Nitrile Diaphragm / Check Valves

SOLIDS-HANDLING
Up to 2 in. (50mm)


HEADS UP TO
125 psi (8.6 bar) or 289 ft. (88 meters) of water

MAXIMUM OPERATING PRESSURE
125 psi (8.6 bar)

DISPLACEMENT/STROKE
.42 gallon / 1.59 liters

DIMENSIONS


DMF2R - Roll Cage - NPT
Dimensions in inches (mm dimensions in brackets)
Dimensional Tolerance: ±1/8" (±3mm)




FRONT




DRILLERS
SERIES



BOTTOM

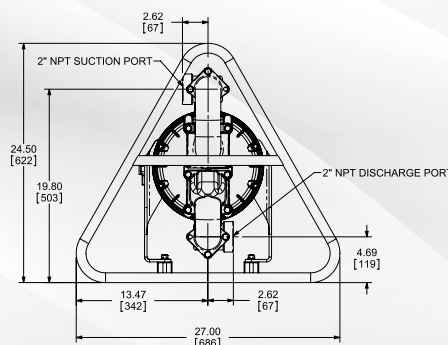

SIDE

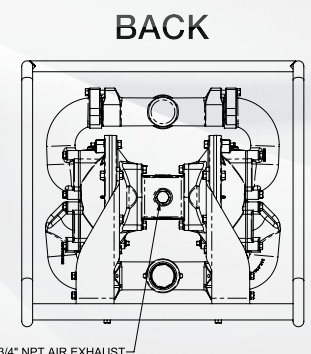

BACK

SANDPIPER®
SANDPIPERPUMP.COM

Warren Rupp, Inc. • A Unit of IDEX Corporation



dmf2mdl1ds_color_rev0615