

SaniForce[™]

Air-Operated Double Diaphragm Pumps for Meat and Poultry



unleash the POWER

Handles solids up to 2.5 inches (6.3 cm) in diameter

- Fluid contact areas are FDA-Compliant and meet CFR Title 21
- · Suitable for applications in meat and poultry processing
- Easy to clean, quick knockdown design

Tel: 866-777-6060

Fax: 866-777-6383

• Featuring Graco's durable, lube-free, non-sticking air valve

PROVEN QUALITY. LEADING TECHNOLOGY.

Springer Pumps, LLC

Website: www.springerpumps.com Int'l: +001 267 404 2910

Ordering Information

SANIFORCE 3150 MEAT AND POULTRY PUMP

Part Number	Pump Type	Inlet/Outlet Size	Diaphragm Material
SFP6F1	Flapper	3 in x 3 in	Santoprene
SFP7F1	Flapper	3 in x 3 in	Buna-N
SFP8F1	Flapper	3 in x 3 in	Fluoroelastomer
SFPAF1	Flapper	3 in x 3 in	Overmolded EPDM

PUMP ACCESSORIES

Part Number	Description
253225	Santoprene diaphragm kit
253223	Buna-N diaphragm kit
253222	Fluoroelastomer diaphragm kit
253224	Overmolded EPDM diaphragm kit
15D990	Leak Detector Kit

Technical Specifications


Maximum fluid working pressure
Maximum free flow delivery*
Maximum suction lift
Maximum size of pumpable solids 2.5 in (6.3 cm) diameter
Maximum diaphragm operating temperature
Santoprene
Buna-N
Fluoroelastomer
EPDM
Typical sound level
at 70 psi air (4.9 bar) air @ 50 cpm
Air pressure operating range 20 to 120 psi
(1.4 to 8.4 bar, 0.14 to 0.84 MPa)
Air inlet size
Weight
Instruction manual
* Flow rates are with muffler and do not vary based on diaphragm material. Displacement

per cycle may vary based on suction condition, discharge head, air pressure and fluid type.

Graco Sanitary and Industrial Solutions

Graco's powerful line of SaniForce quick knockdown diaphragm, high sanitation, and piston pumps, plus our drum and bin unloaders, are used in a variety of sanitary applications including pharmaceutical, cosmetic, beverage and food processing.

Our industrial equipment offers a complete line of priming piston and air-operated double diaphragm pumps for low to high viscosity fluids for a wide range of applications.

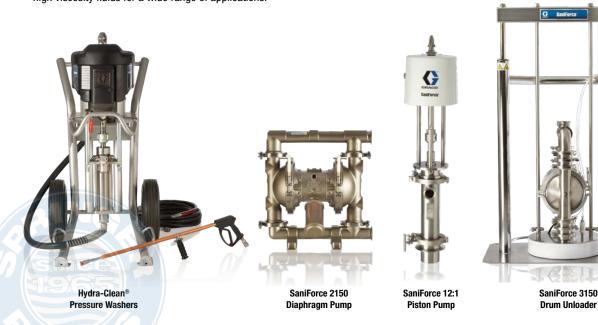

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice

Call today for product information or to request a demonstration.

877.84GRACO (1-877-844-7226) or visit us at www.gracosaniforce.com

©2010 Graco Inc. Form No. 338067 Rev. E 09/16 Printed in the U.S.A.

Tel: 866-777-6060

Fax: 866-777-6383



