

Self-Priming Centrifugal Pedestal Pumps

- **Cast Iron & Stainless Steel Construction**
- **Buna-N Mechanical Seals on Cast Iron
Viton® Mechanical Seals on Stainless Steel Model**
- **Optional Silicon Carbide Mechanical Seals Available**
- **1-1/4" to 3" NPT Suction and Discharge Port Sizes**
- **Dual Volute Design Reduces Radial Load on Motors**
- **Maximum Temperature**

Buna-N	180° F
Viton®	200° F
- **Self-cleaning, Semi-open Impellers**
- **Sized for 1 HP to 7-1/2 HP Driver Depending on Model**
- **Heavy Duty Cast Iron Pedestal Drive with Sealed Ball Bearings**

AMT Self-Priming Centrifugal Pedestal pumps are designed for a wide range of industrial, agricultural and commercial applications. Dual volute design reduces radial load on motor. Heavy duty cast iron construction with Buna-N seals or Stainless Steel with Viton® seals. Pumps are fitted with a self-cleaning, semi-open impeller and are coupled to a heavy duty cast iron bearing housing with a CNC machined keyed shaft extension and sealed ball bearings. The pump has been designed for either direct connection or belt drive. The maximum recommended RPM is 4000.

AMT Self-Priming Centrifugal Pedestal pumps are reliable, cost effective and low maintenance. For use with non-flammable liquids which are compatible with pump component materials.

Viton® is a registered trademark of E.I. DuPont

INDUSTRIAL DUTY




Model 2850-99




Model 2760-99

Performance of Self-Priming Pedestal Pumps

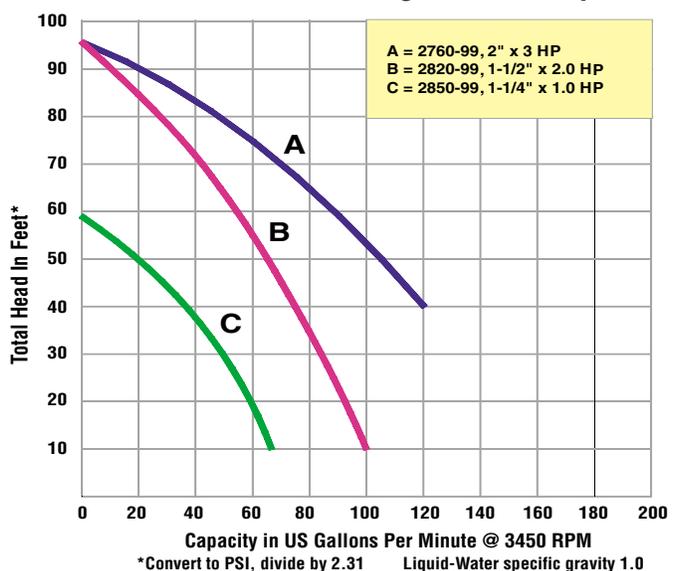

Self-Priming Centrifugal Pedestal Pumps

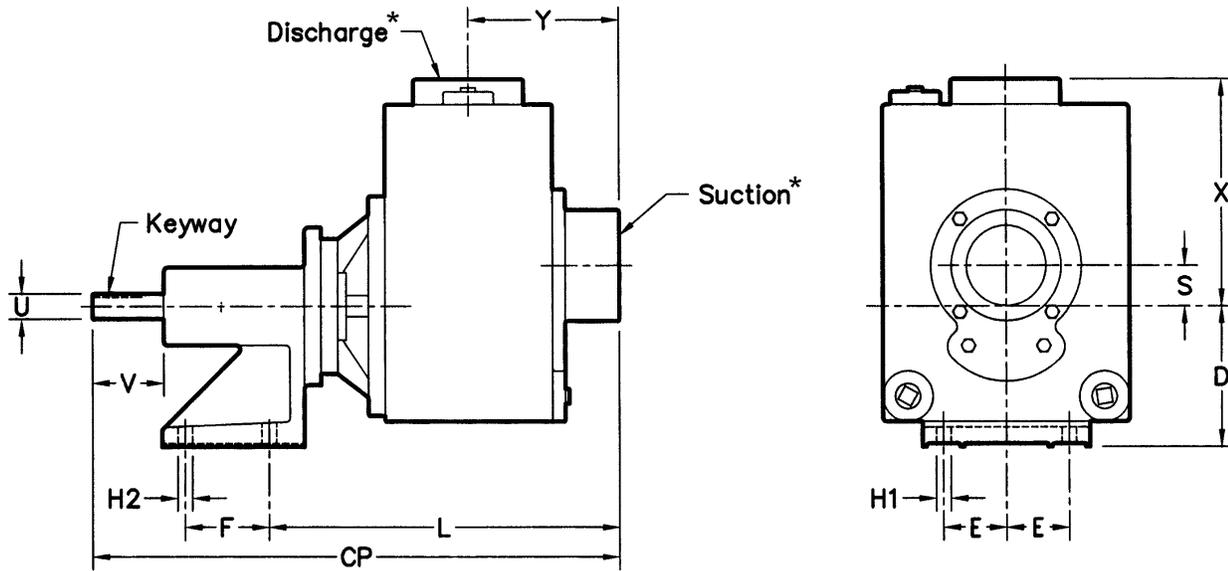


Pump Dimensional Data

Model No.	CURVE	SUC*	DIS*	CP	D	E	F	H1	H2	L	S	Dia.		Keyway		Min. BHP Required @3450 RPM	Ship Wt.	Material	
2850-99	C	1-1/4"	1-1/4"	11.8	3.2	1.7	N/A	0.7	0.5	8.5	2.4	5/8"	1.3	3.6	2.7	3/16" x 1"	1.0	23 Lbs.	C. Iron
2820-99	B	1-1/2"	1-1/2"	11.1	4.5	2.2	N/A	0.7	0.5	7.1	0.4	5/8"	1.3	5.1	3.5	3/16" x 1"	2.0	32 Lbs.	C. Iron
2820-98	B	1-1/2"	1-1/2"	11.1	4.2	1.8	2.5	0.4	0.4	9.1	0.4	3/4"	2.1	5.1	3.5	3/16" x 1-7/8"	2.0	32 Lbs.	S.S
2760-99	A	2"	2"	15.7	4.1	1.8	2.5	0.4	0.4	10.4	1.2	3/4"	1.1	6.7	4.5	3/16" x 1-7/8"	3.0	48 Lbs.	C. Iron
2761-99	A	2"	2"	15.7	4.2	1.8	2.5	0.4	0.4	10.4	1.2	3/4"	2.1	6.7	4.5	3/16" x 1-7/8"	3.0	48 Lbs.	S.S

(*) Standard NPT (female) pipe thread.
NOTE: Dimensions have a tolerance of $\pm 1/8"$.

Standard Features



- Cast Iron & Stainless Steel Construction
- Mechanical Seal:
 - Standard Cast Iron Buna-N
 - Standard Stainless Steel Viton®
- Maximum Temperature
 - Buna-N 180° F
 - Viton® 200° F
- 1-1/4" to 2" NPT Suction/Discharge Ports
- Maximum Working Pressure 75 PSI
- Maximum 4000 RPM
- Solids Handling to 3/8" Diameter
- 1-1/2" & 2" Models Feature a Built-in Check Valve
- Self-priming up to 20 ft. @ 3450 RPM
- Dual Volute Design Reduces Radial Load on Motor

ots
 OFF THE SHELF
PUMPS

Viton® is a registered trademark of E.I. DuPont

See price book page 22

The Gorman-Rupp Company reserves the right to discontinue any model or change specifications at any time without incurring any obligation.

CP61-62/0706